



RAPID CONSTRUCTION - EXCEEDING EXPECTATIONS

MI HOME



BUILD-QUICK™
PREFAB SOLUTIONS

WWW.EPACK.IN

COMPANY PROFILE



EPACK Prefab is one of the leading manufacturer and suppliers of Prefabricated structures in India, EPACK has supplied over millions of sq. ft. area in prefab structures around the world , and has accredited the international standards of ISO9001:2000 and ISO14001:2004 quality management systems.


EPACK PREFAB MI-HOMES



Mi Guard Room



Mi Cabin

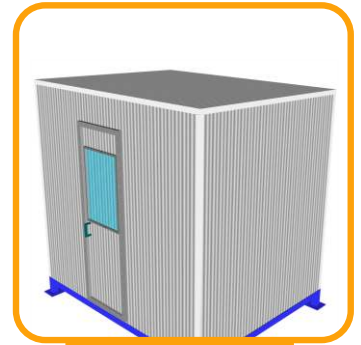

Mi Shelter

EPACK PREFAB Mi Homes is a flatpack kit which is built on efficiently designed structures as per IS code, surrounded by protective Sandwich Panels that can be simply and quickly erected to create a robust structure for different applications.

FEATURES




THERMALLY INSULATED



QUICK AND EASY TO INSTALL



DO IT YOURSELF BUILDING



MULTIPLE LAYOUT AND COLOR OPTIONS



ECO FRIENDLY



DURABLE AND MAINTENANCE FREE

MI GUARD ROOM 4X4 FT

Magic Homes One Home in Minutes....



● PUF Panel- 50MM

● Door-D-750X1800

● Colour- As Per Requirement

● Ceiling Panel- 50MM



● Window-W1-900X900- 2Nos.

APPLICATIONS



- Guard Room
- Ticket Counters
- Traffic Police Cabin
- Portable Toilet For Events
- Check Post
- Watch Tower Cabin






LAYOUTS-4X4

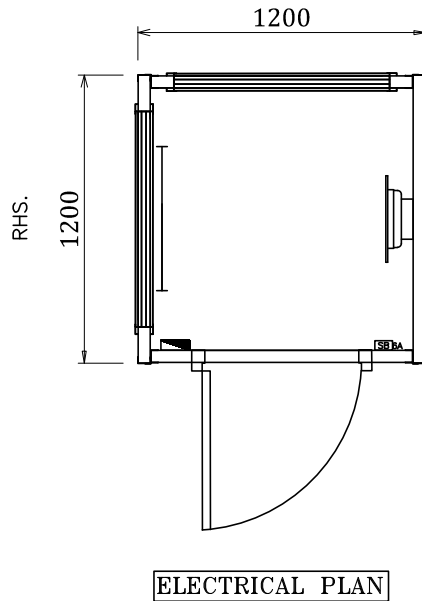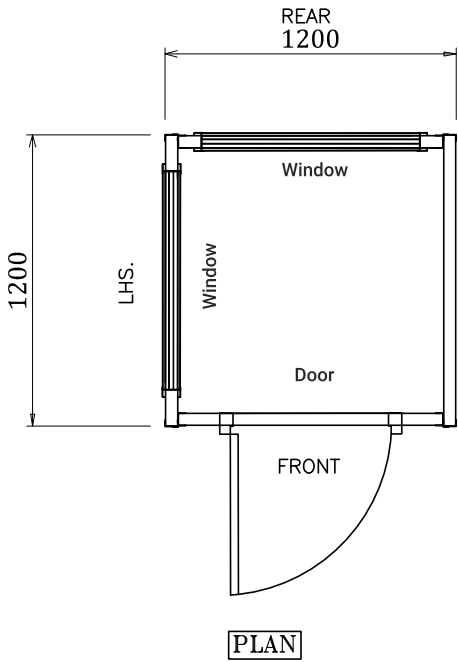

MODEL A1 Size-4X4

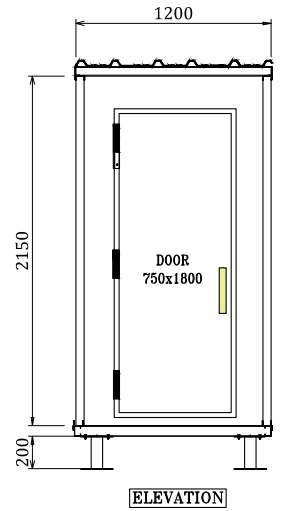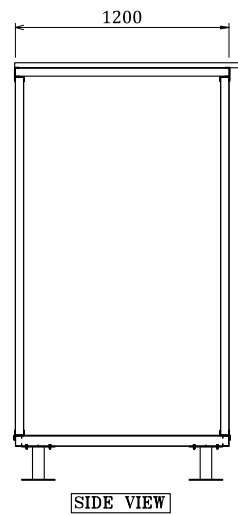


MODEL A2 Size-4X4

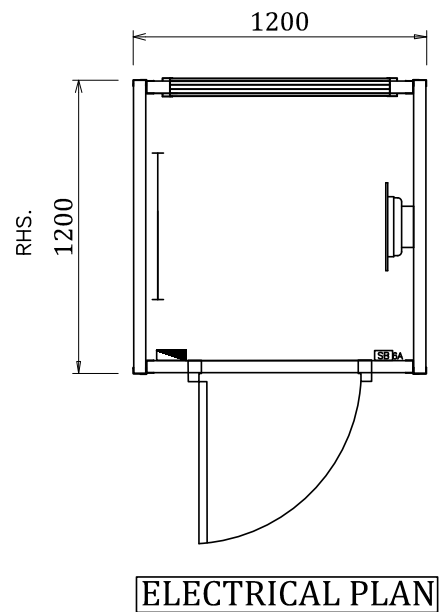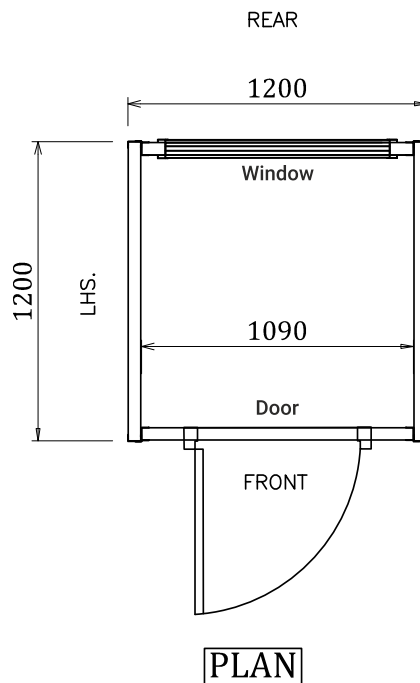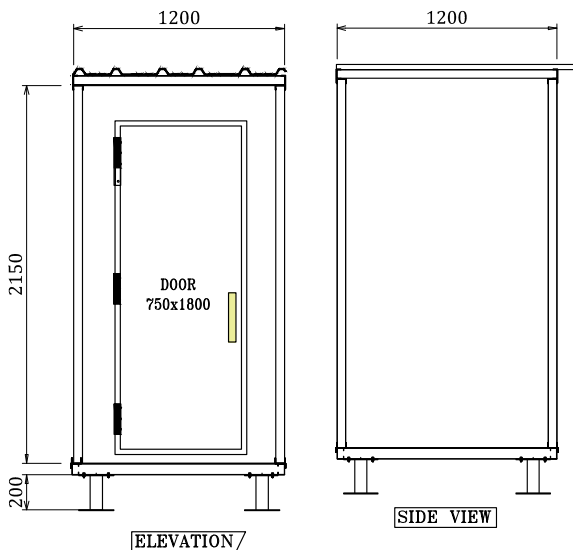


LAYOUTS-4X4


MODEL A3 Size-4X4

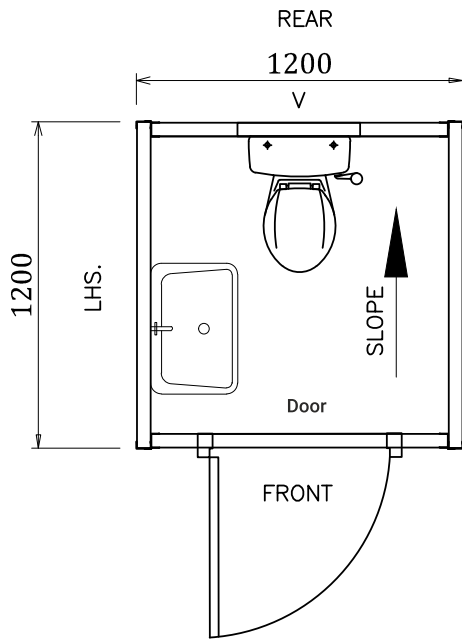


PLAN

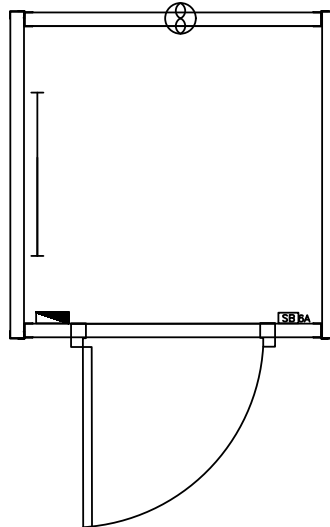


ELECTRICAL PLAN

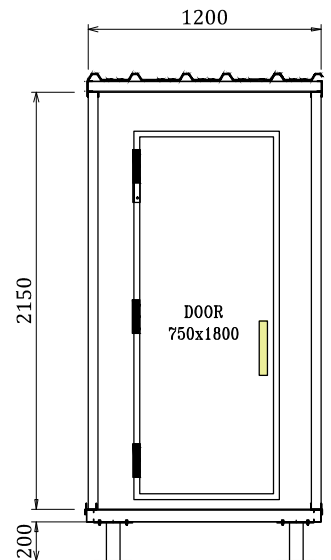


ELEVATION

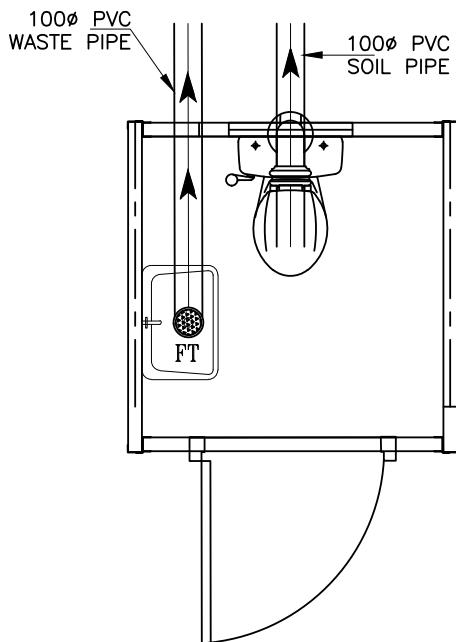

SANITARY PLAN

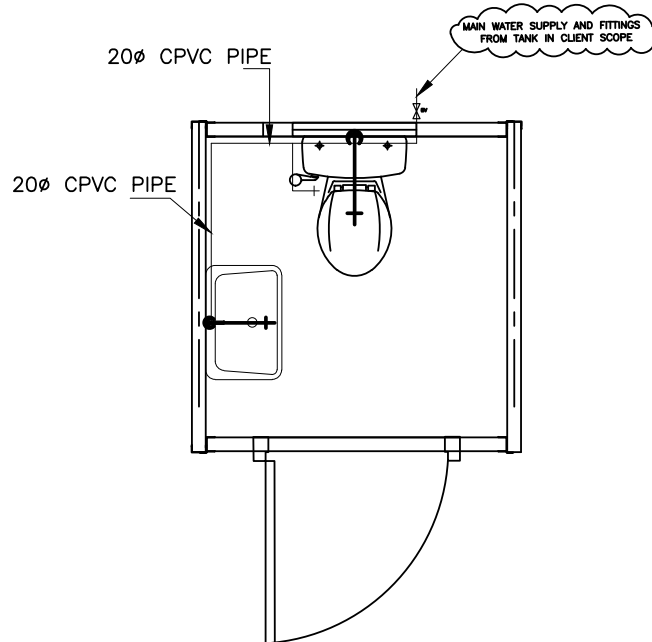

WATER SUPPLY PLAN

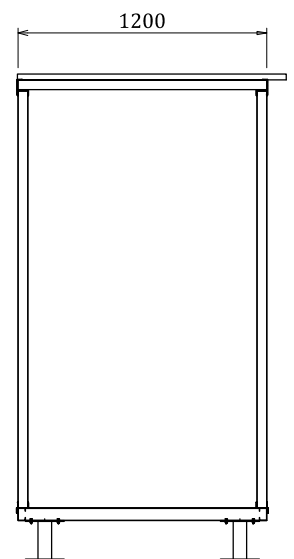

SIDE VIEW

MI CABIN 6X4/6X6 FT



- Wall Panel- 50MM
- Door- D-750X1800
- Colour- As Per Requirement
- Ceiling Panel- 50MM
- Window- W1-900X900- 2Nos.


APPLICATIONS

- Security Cabins
- Railway Signal Cabin
- Toll Plaza Cabins
- Site Cabins
- Temporary Medical Center
- Store Room




LAYOUTS-6X4


MODEL A1 Size-6X4

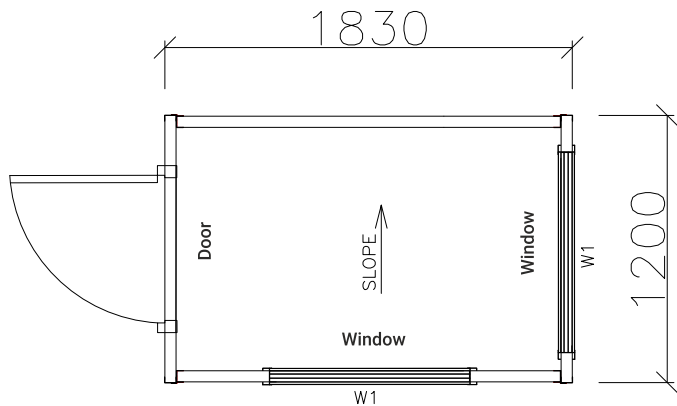

PLAN

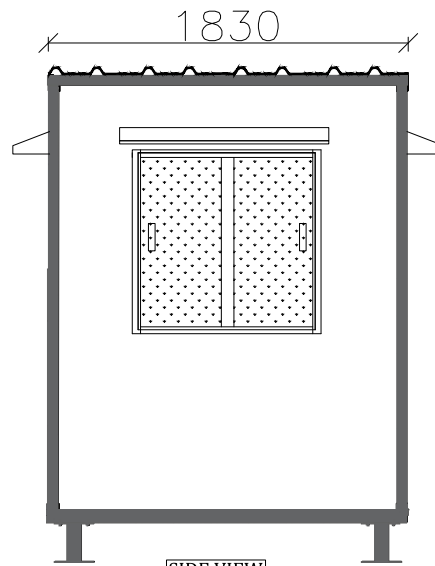


SIDE VIEW

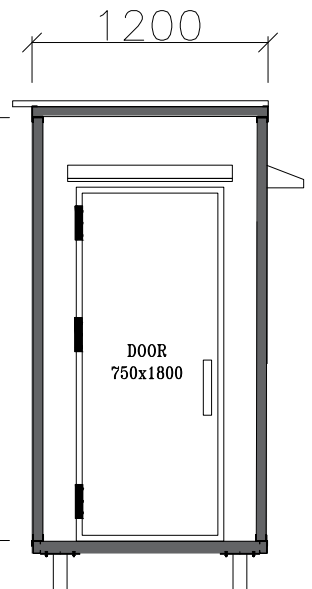


ELEVATION


MODEL A2 Size-6X4

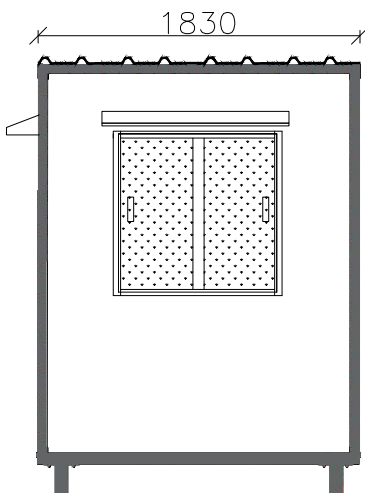

SIDE VIEW

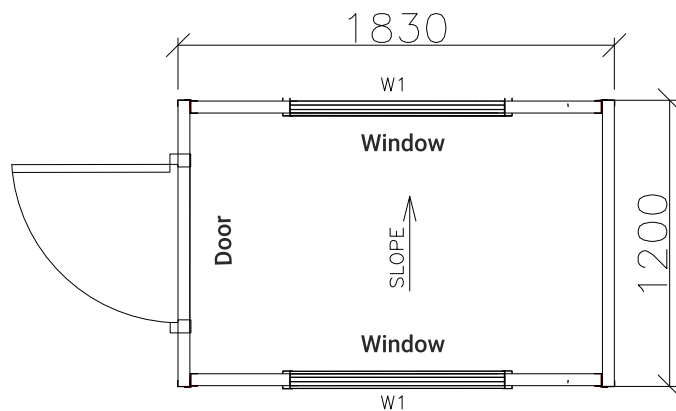


PLAN

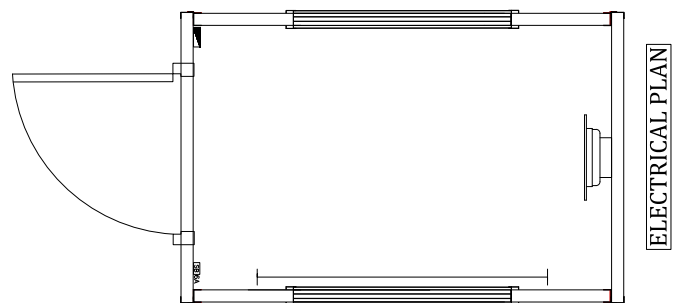



ELEVATION

LAYOUTS-6X4


MODEL A3 Size-6X4

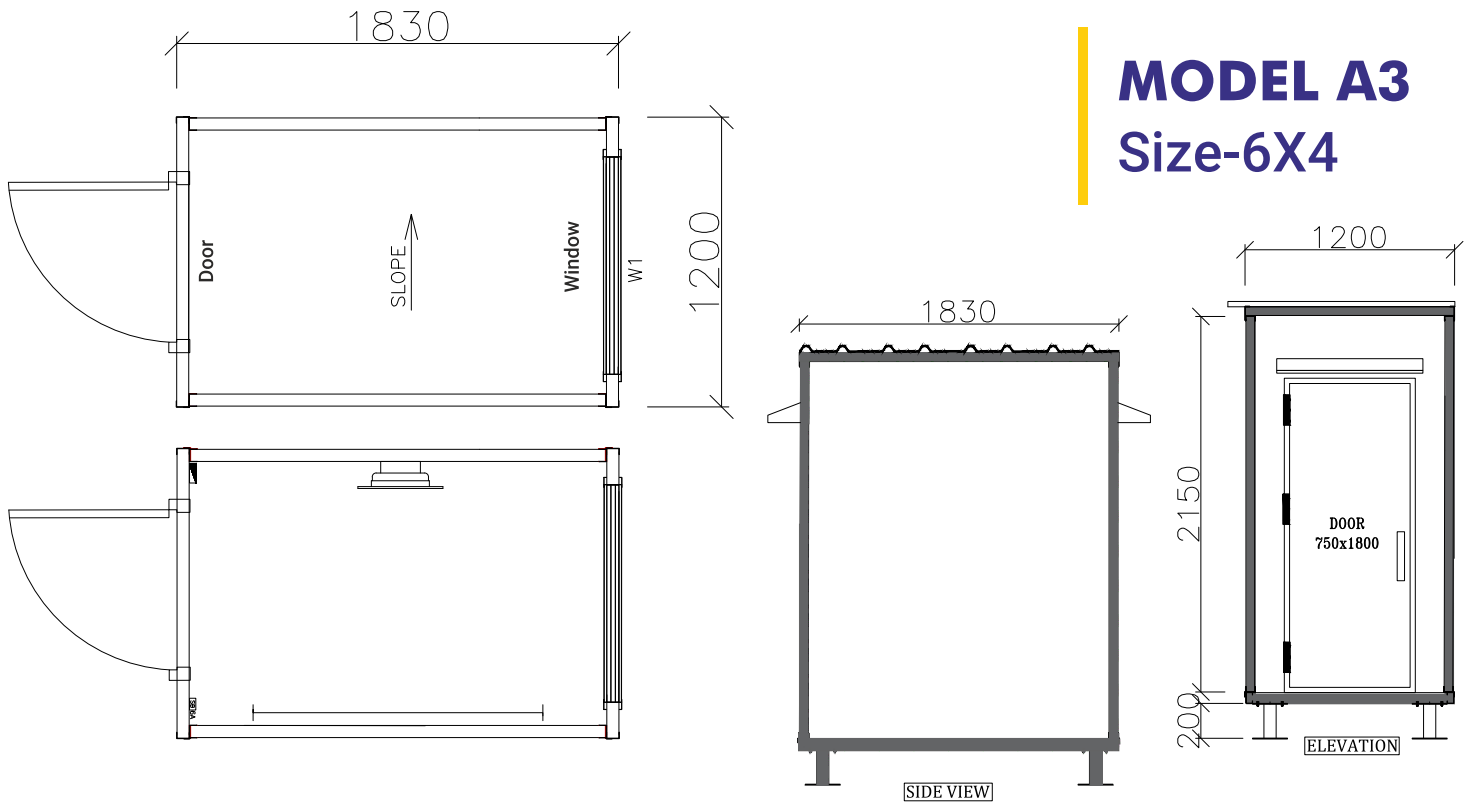


MODEL A4 Size-6X4

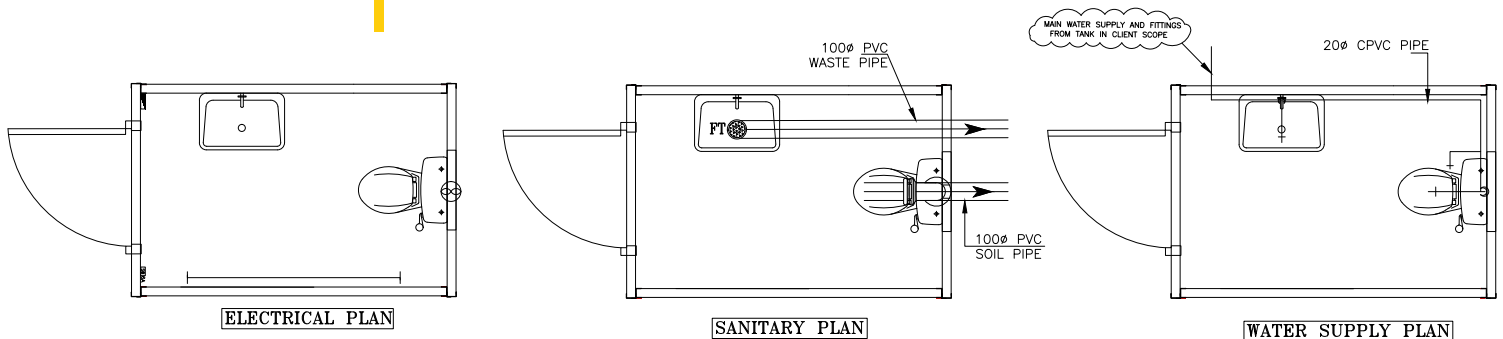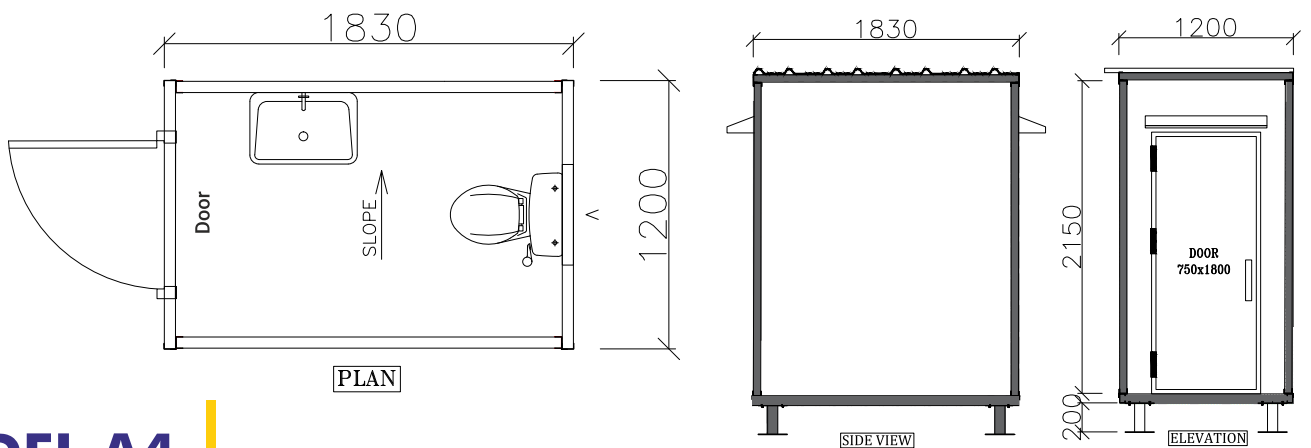



LAYOUTS-6X6

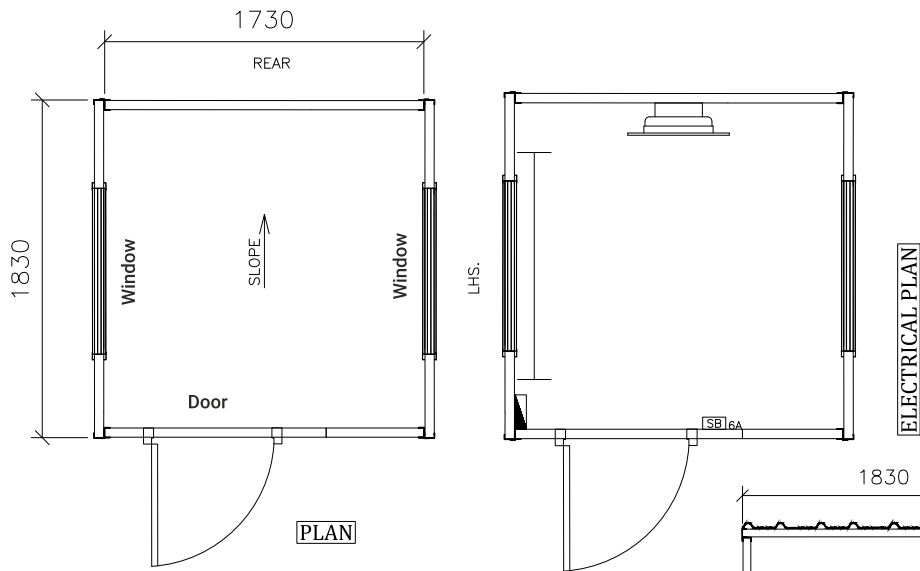


MODEL A1 Size-6X6

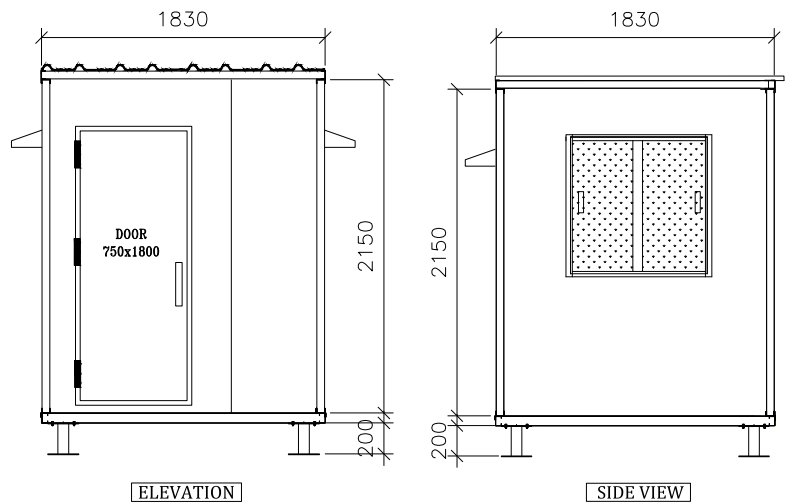




MODEL A2 Size-6X6

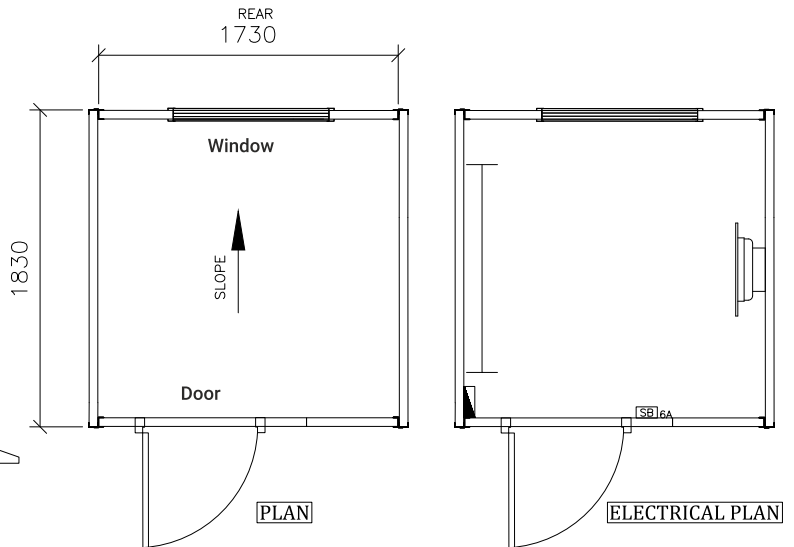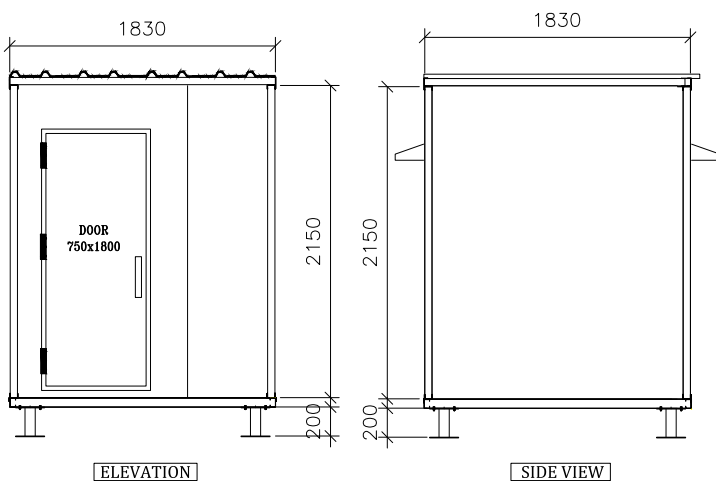

LAYOUTS-6X6

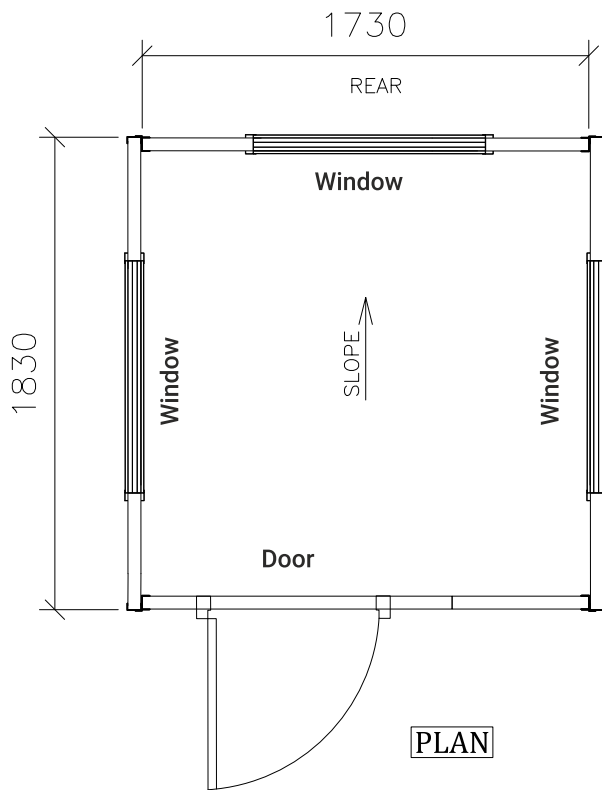

MODEL A3 Size-6X6

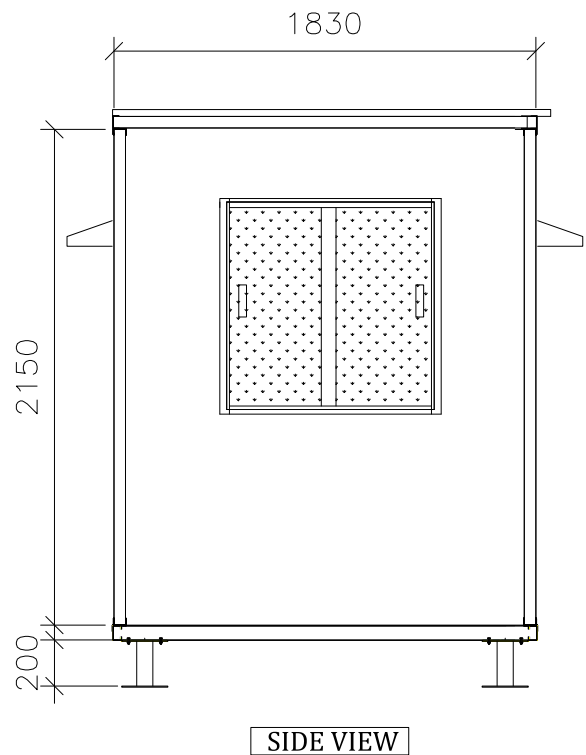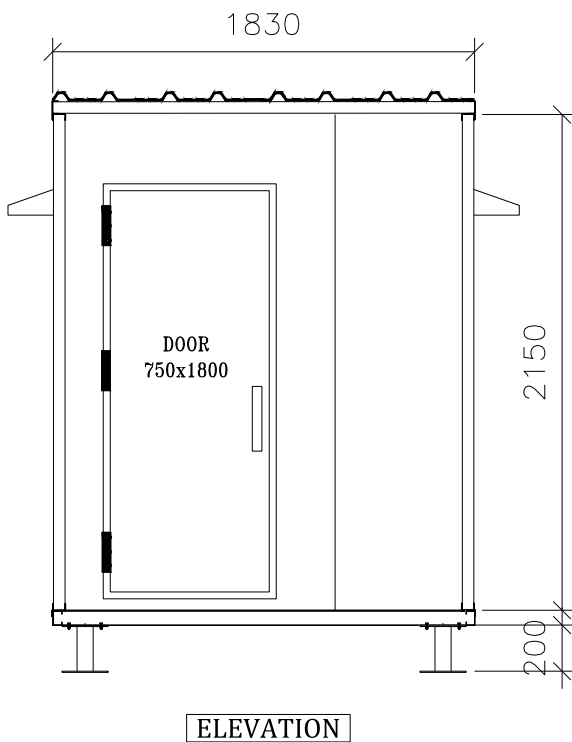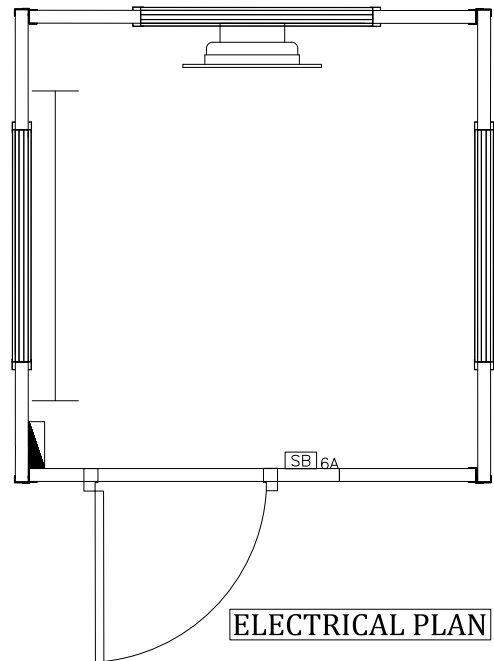

MI SHELTER 8X8 FT


Magic Homes One Home in Minutes....





- WALL PUF Panel- 50MM
- Door- D-750X1800- 1Nos.
- Colour- As Per Requirement
- Ceiling Panel- 50MM
- Window- W1-900X900- 2Nos.

APPLICATIONS



- Site / Marketing Offices
- Toilet Block/Ablution
- Disaster Relief Camp
- Military Camps
- Multipurpose Buildings

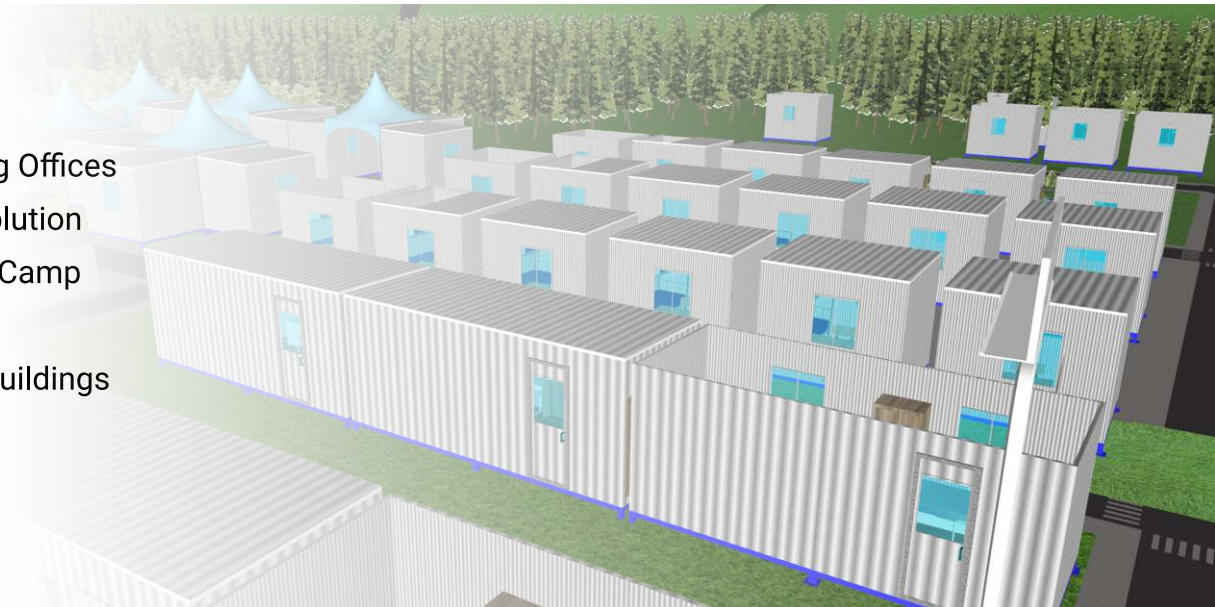




LAYOUTS-8X8

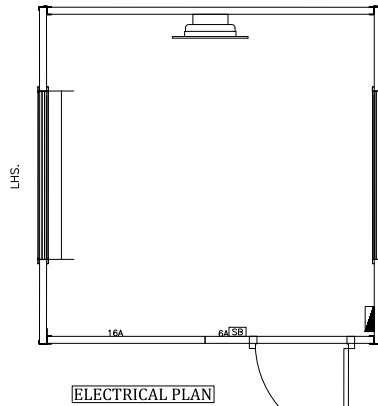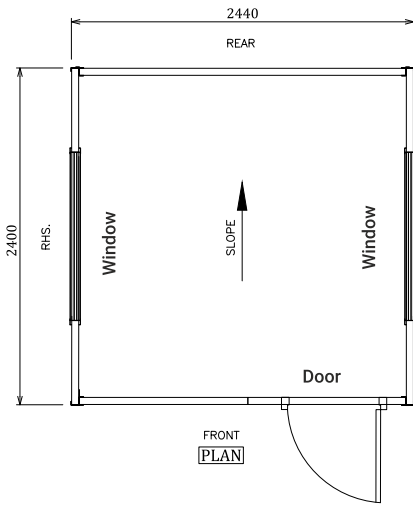

MODEL A1 Size-8X8





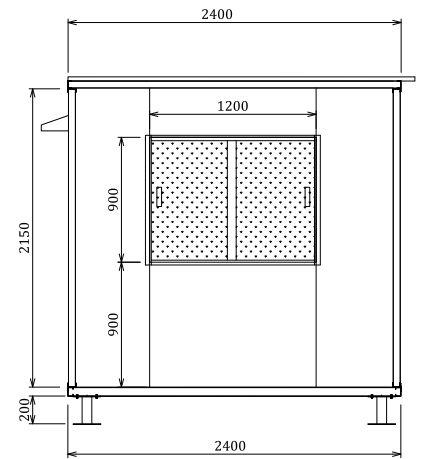
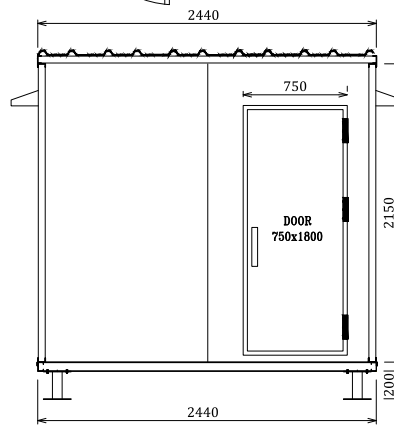


MODEL A2 Size-8X8

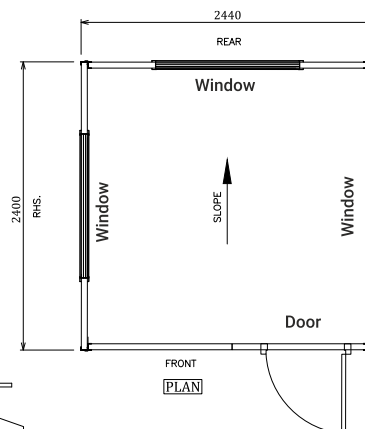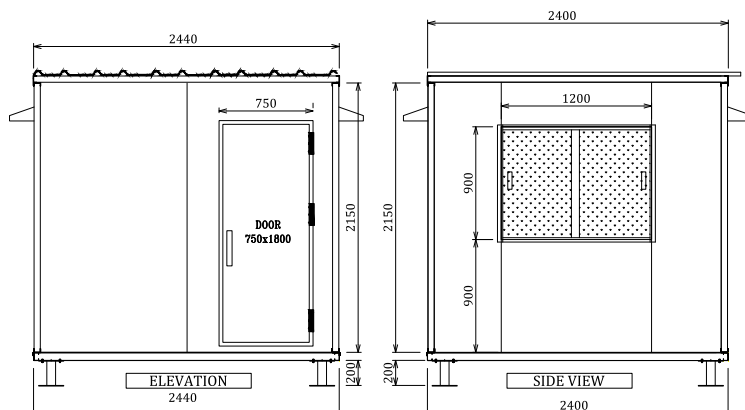

LAYOUTS-8X8

MODEL A3 Size-8X8

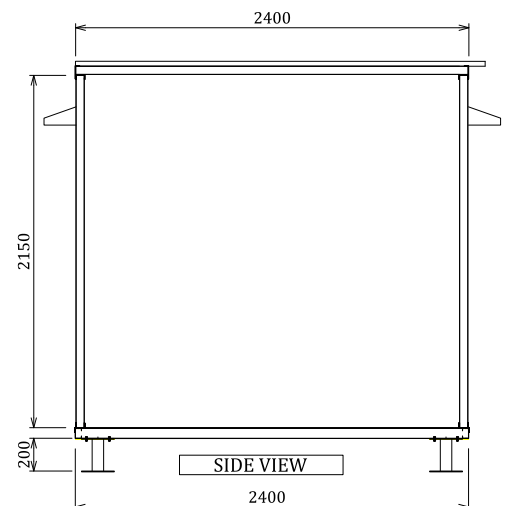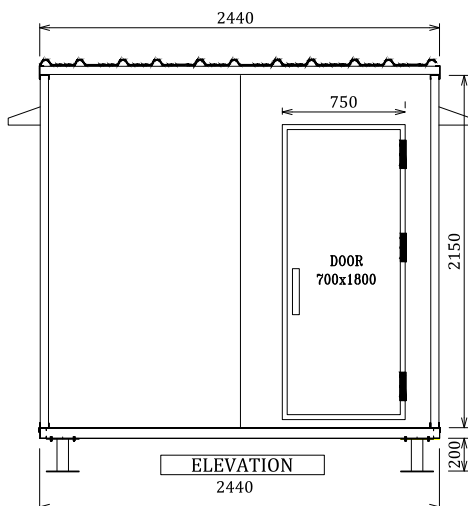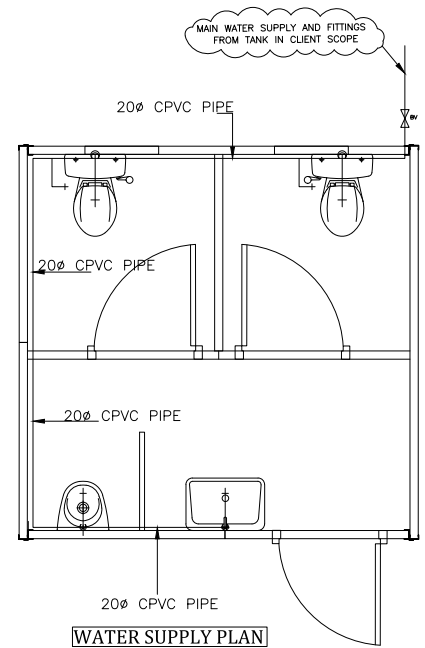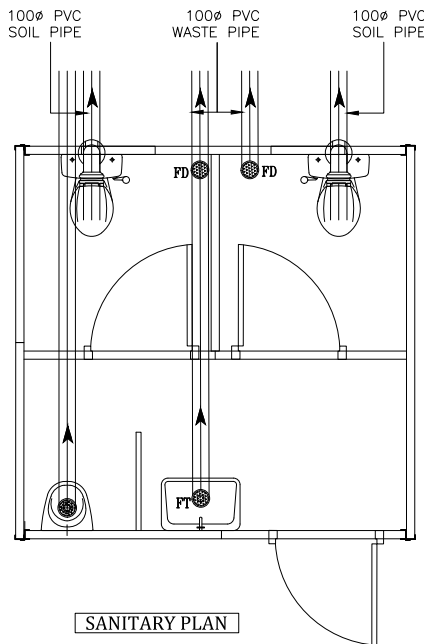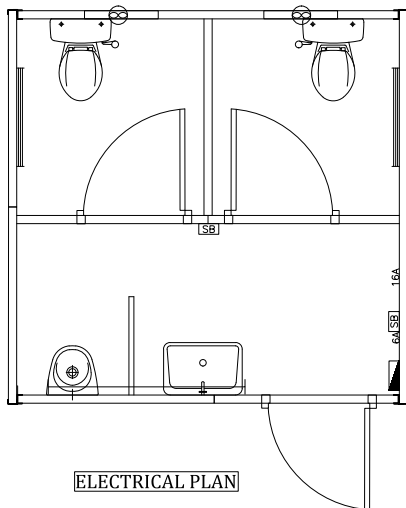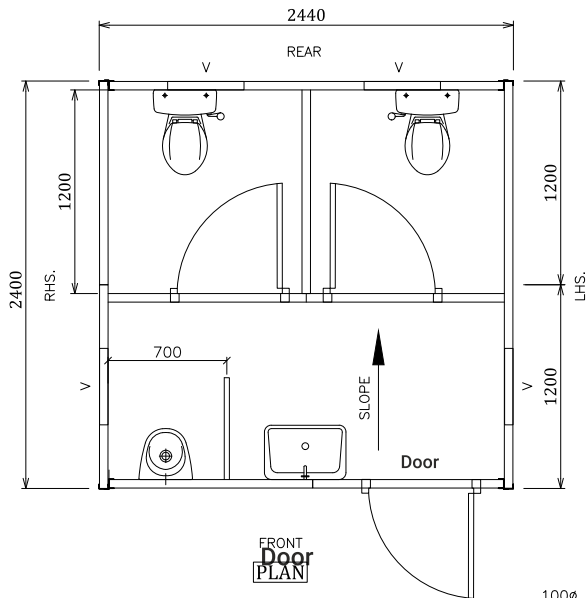

TRANSPORTATION

The design of EPACK PREFAB Mi Homes are so compact that a kit of 24 Flat pack can be easily loaded in a standard shipping container for transporting by Road, Rail, Sea or Air.


Transportation Option :

Cargo Plane	40 Rooms
40' HiCube Container	24/28 Rooms
40' Standard Container	20/24 Rooms
20' Container	10/12 Rooms

Subject to module size



COMPONENTS

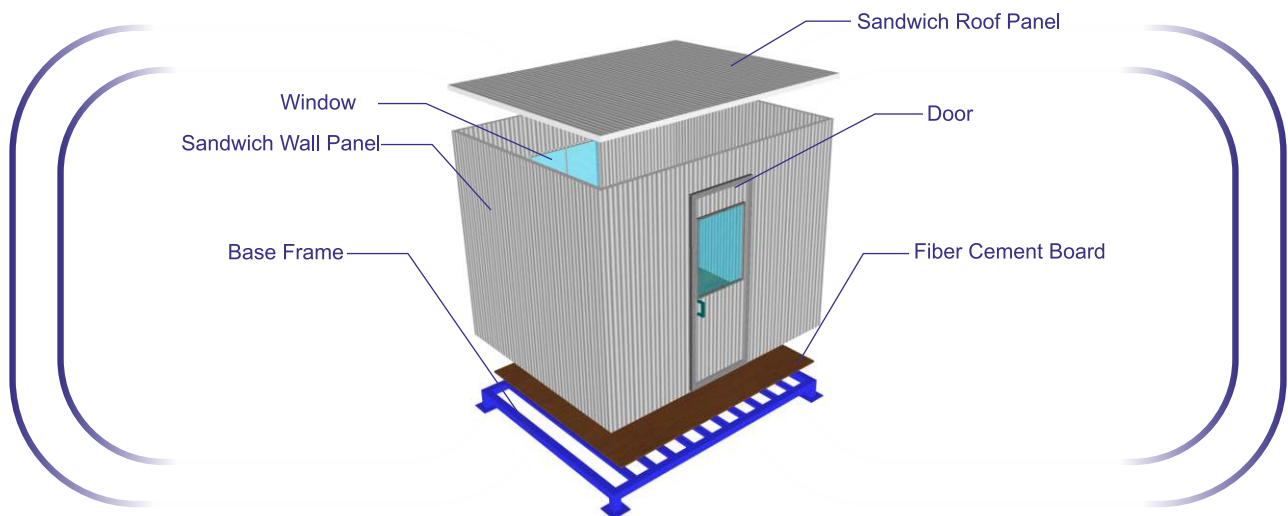

Roof and Wall Panel



- 50mm thick sandwich panels.
- Pre painted Galvanized iron sheets on either side.

Window



- Made of powder coated (white color) aluminum extruded section.
- Non toughened window glass.
- 1000 x 900mm in dimension.

Floor Board



- 18mm Cement fiber board of EPACK approved make.
- Can be fixed on the floor with SD Screw.

Base Frame



- Made up of Mild-steel.

Door



- Made of sandwich panels.
- Same color as walls.
- 750 X 1800mm in dimension.

INSTALLATION

1

Base Frame Assembly



2

Floor Board Assembly



3

1st Wall Panel Installation



4

2nd Wall Panel Installation



5

3rd Wall Panel Installation



6

4th Wall Panel Installation



7

Roof Installation



Mi Home



Mi Homes can be install completely within **20 minutes** with unskilled workers .

SALES TEAM PRESENCE

New Delhi , Jaipur, Mumbai, Pune, Vadodra, Bhubaneswar, Vapi,
Surat, Kolkata, Indore, Bangalore, Vizag, Jamshedpur, Patna,
Coimbatore, Chandigarh, Guwahati

BRANCH OFFICES

- HYDERABAD:-101 A, Trendz Sapphire Building, Hitech City
Hyderabad-500081 Telangana, INDIA
- CHENNAI:-152, 2nd Floor, Guleacha Tower, Somasundara
Bharathi Nagar, Chennai Tamilnadu-600026, INDIA.
- AHMEDABAD:- 1013, One World West, Sardar Patel Ring Road,
Bopal, Ahmedabad Gujarat-380058, INDIA



Scan to Download
Technical & Product Brochure



Scan to Watch Project
Videos

MANUFACTURING PLANTS / OFFICES

- UNIT-1&2:-B 13 & 14 Ecotech-1st Extension Greater Noida-201306 Uttar Pradesh, INDIA
- UNIT-3:-SP5/128, Ghiloth Industrial Area, Ghiloth-301705 Rajasthan-INDIA
- UNIT-4:- Plot No-5, APIIC Industrial Park, Mambattu (Near Sricity),
Tada Mandal Tirupati District-524401 Andhra Pradesh, INDIA
- UNIT-5:- Plot No- 6, APIIC Industrial Park, Mambattu (Near Sricity),
Tada Mandal Tirupati District-524401 Andhra Pradesh, INDIA



+91-95 994 85789



reach@epack.in



www.epack.in